

P2.5 Outdoor LED Module

MW7725-MO-H1



Features


- The R, G, B dies are encapsulated together to form a single pixel, delivering excellent color mixing effect and uniformity.
- Integrates lamp board and drive board for even current distribution, low power consumption, and fast heat dissipation.
- High brightness, low attenuation, high reliability, and high weather resistance.
- Matte black cover with a special pattern design presents high contrast.
- The PCB surface of the module is properly treated to prevent moisture, water, and corrosion. The module adopts a PC engineering plastic bottom shell, undergoes waterproof treatment with AB potting glue and anti-UV treatment, and uses hermetic surface, reaching IP65 waterproof rating.
- Long lifetime.
- Ultra-wide viewing angle ensures satisfactory viewing experience from diversified angles.

Specifications

Module	Description
Pixel Pitch	P2.5

Module Resolution (W x H)	128 x 64
Module Dimensions (mm)	320 x 160 x 17.05
Processing Image	Description
Single Pixel Brightness Correction	Support
Single Pixel Color Correction	Support
Brightness (nits)	4500
Color Temperature (K)	3500 to 9000
Viewing Angle (H/V)	120°/120°
Center Distance Deviation of LED	<3%
Brightness Uniformity	≥97%
Color Uniformity (Cx, Cy)	±0.003
Contrast Ratio	3000 : 1
Processing performance	Description
Pixel Density (pitch/m ²)	160000
Grayscale	14bit
Scanning Mode	16 S
Drive Mode	Constant current driving
Refresh Rate (Hz)	≥3840
Frame Frequency (Hz)	50/60
Electrical	Description
Power Supply	DC 4.5 V
Average Power Consumption (W/m ²)	280
Max. Power Consumption (W/m ²)	850
General	Description
Unit Board Signal Interface	HUB75
Ingress Protection	IP65
Weight (Kg/pcs)	0.47±0.02
Operating Temperature	-20°C to 50°C
Operating Humidity	10% to 90% RH, non-condensing
Storage Temperature	-40°C to 60°C
Storage Humidity	10% to 90% RH, non-condensing
LED Lifetime (h)	100000

Dimensions

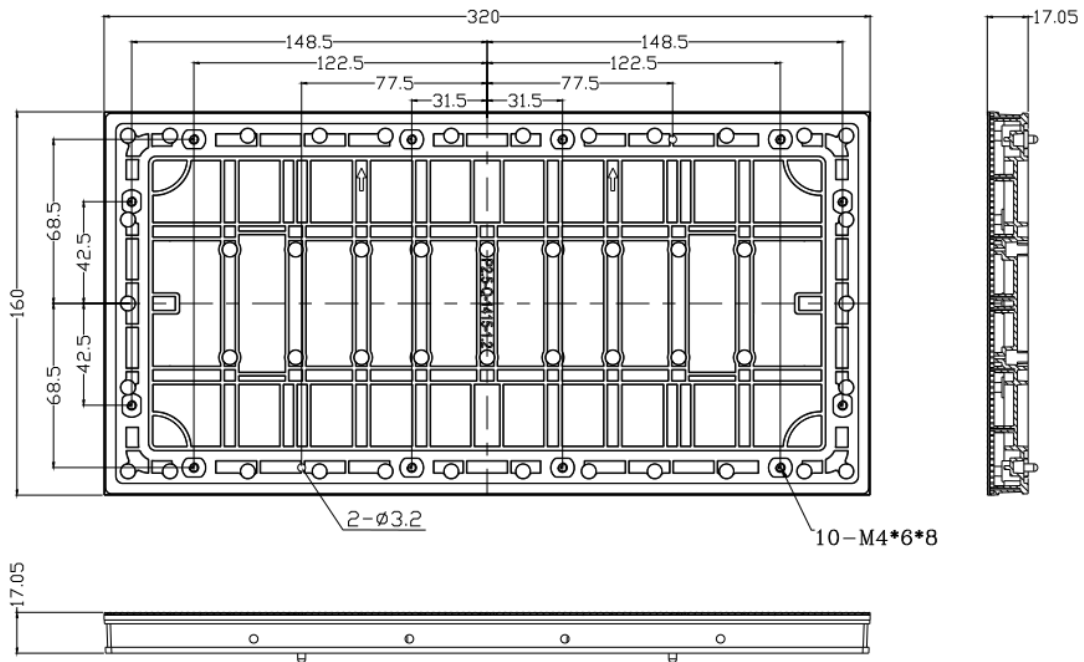

Ordering Info

Product Model	Description
MW7725-MO-H1	P2.5 Outdoor LED Module

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.